

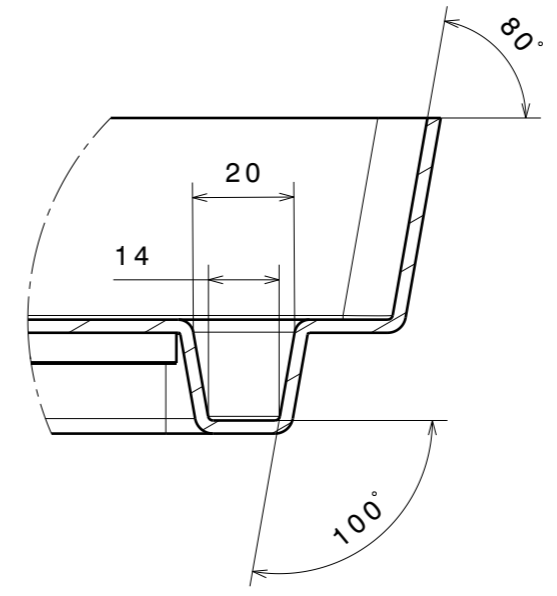



Section view B-B

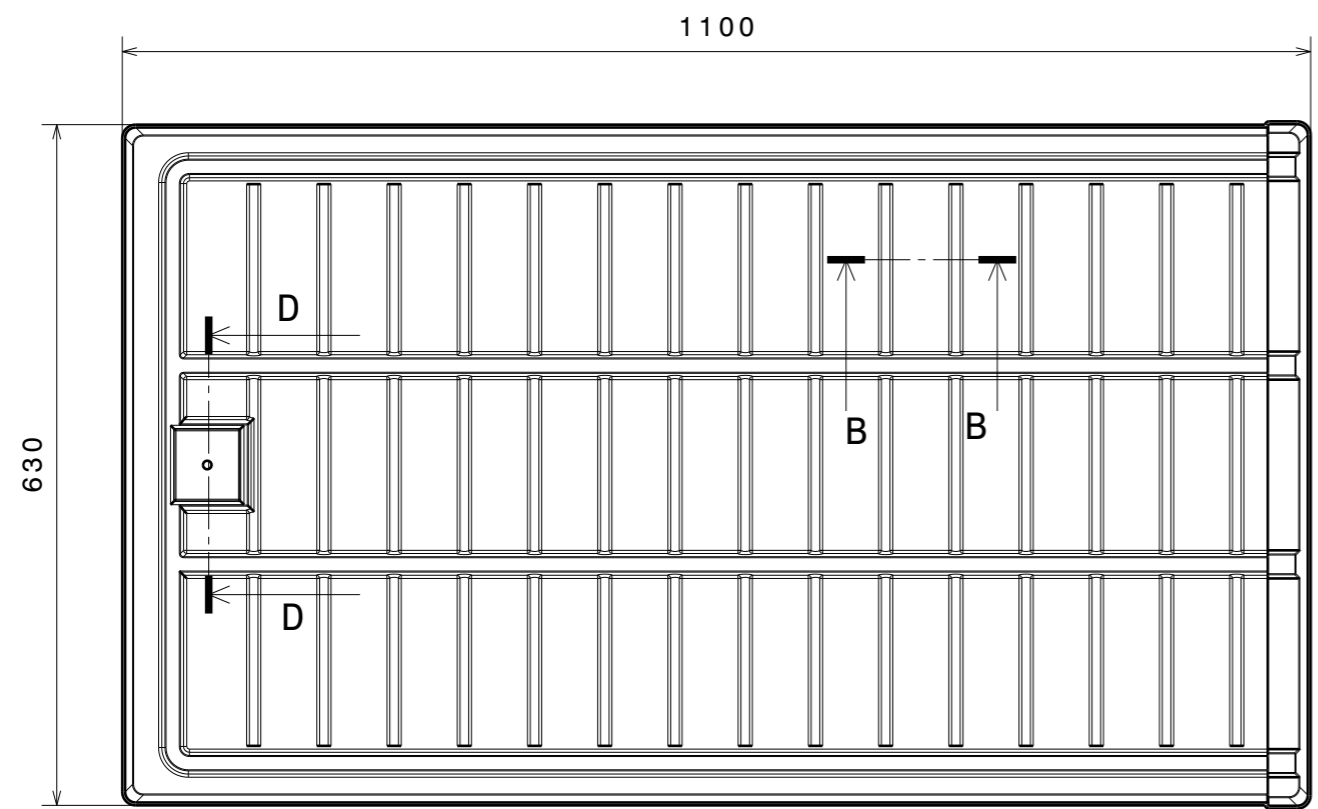

Detail C

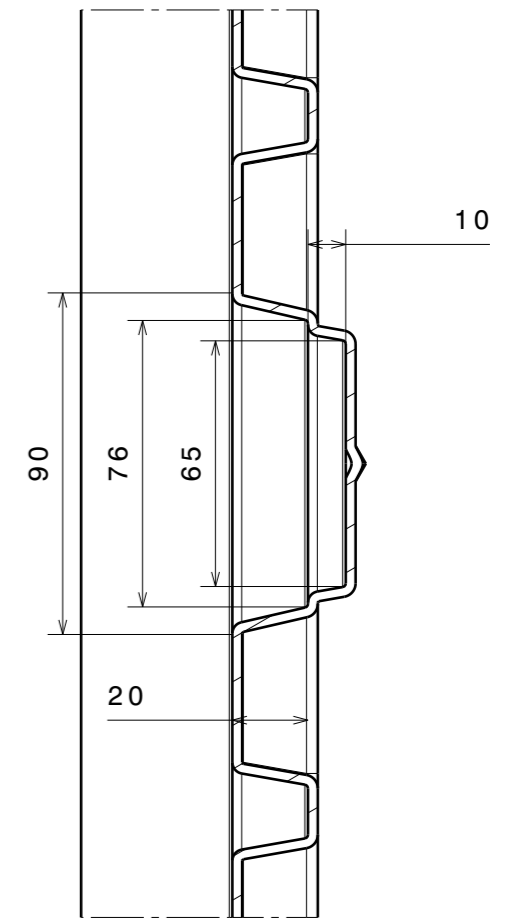

Section view D-D

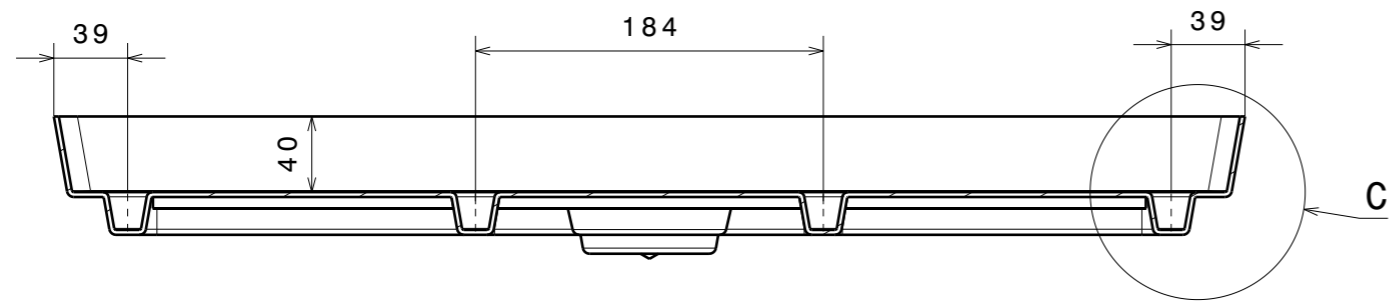

Section view A-A

<b>Tolerances at 20°C:</b> 0000 - 1000 mm: ± 3,00 mm 1000 - 2000 mm: ± 3,50 mm 2000 - 3000 mm: ± 4,00 mm 3000 - 4000 mm: ± 5,00 mm 4000 - 5000 mm: ± 6,00 mm 5000 and above: ± 7,00 mm <small>Coefficient of Thermal expansion: 0,10 mm/(m·K)</small>	Costumer:	Ref:	Date:	Order no:
	<b>Approved by costumer:</b>		Material:	Color:
	Date: - -	UV-filter on toplayer:		<b>staalplast</b> Industrivej 19, DK-5750 Ringe Tel: +45 62621216 Fax +45 62623611 Web: www.staal-plast.dk E-mail: mail@staal-plast.dk
	Sign:	<b>Type: 1 - 630/4</b>		
			<b>Size: 630 X 1100</b>	